


DFT® LSV-100™

The LSV-100 Control Valve is an economical control valve designed for flanged applications. Trim is replaceable in the field through the bonnet. Construction is Carbon or Alloy Steel with stainless steel internals. Other materials of construction are available upon request. Can be used for modulating control or for on/off gas, liquid and steam applications. Class IV shutoff is standard.



FEATURES:

- 1/2" to 6"
- ANSI 150 and 300
- Carbon Steel and Alloy Steel
- ANSI RF ends
- Top entry
- Globe design
- Characterized trim — Equal Percentage, Linear, Quick Opening
- Pneumatic Actuation

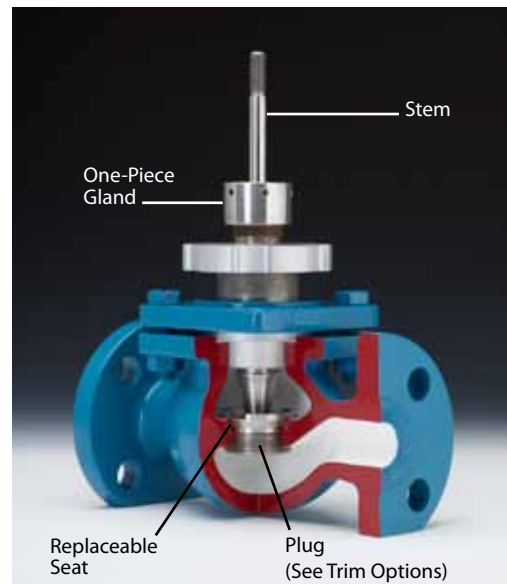

LSV-100 Maximum Flow Coefficient								
Size NPS	1/2	3/4	1	1.5	2	3	4	6
Size DN	15	20	25	40	50	80	100	150
Cv (Kv)	5 (4)	8 (7)	13 (11)	30 (26)	50 (40)	117 (100)	176 (150)	445 (380)

DFT® is a Registered Trademark of DFT Inc. LSV-100™ is a trademark of DFT Inc.



140 Sheree Blvd.
P.O. Box 566
Exton, PA 19341-0566

e-mail: dft@dft-valves.com
internet: www.dft-valves.com

610-363-8903
800-206-4013
FAX 610-524-9242